



TECHNICAL SPECIFICATIONS

EMEA, APAC, LATAM Version



Shown: PM 1122ED with optional Additional Sliding Unloading Shelf,
7-Day Automatic On/Off Timer and XTREME Performance 500°C.

Project _____

Item No. _____

Quantity _____

Date _____

PM 112X Series

PM 1121ED, PM 1122ED, PM 1123ED, PM 1124ED, PM 1125ED

PizzaMaster® Modular Electric Deck Oven

- The world's largest range of electric deck ovens.
- Trusted in 170+ countries and counting.
- Unmatched capacity. Unstoppable output.
- Precision baking made effortless.
- Built to last. Backed for life.

International Voltage
and Certifications

– Available upon request



Standard Features

✓ IQControl Panel™	✓ Vent Control Lever for Each Deck	✓ Multi-Functional Oven Stand
✓ TempIQ Recovery™	✓ High-Density Insulation	✓ Ventilation Hood
✓ TempIQ Guard™	✓ Strong Ergonomic Oven Door Handles	✓ Disassemble Design 3/4/5-Deck Ovens Available as an option on 2-deck oven
✓ TurboStart	✓ Durable Long-Life Oven Door	✓ Resettable Overheat Protection
✓ Balanced Heat Distribution™	✓ Pull-Up Oven Door	✓ 1 & 3 Phase EI. Power Supply Available
✓ 3 Heat Zones: Top, Bottom, Front	✓ Large Clear Window Glass Oven Door	✓ Flexible Power Supply for 400V Single or multiple incoming supply cables
✓ Maximum Baking Temperature: 400°C	✓ Stainless Steel Front	✓ International Voltages & Certifications Available upon request
✓ Ceramic Clay Stones w/ Crisping Function Rec. for baking temperatures up to 370°C	✓ Ventilated Front	✓ Start-Up Maintenance Kit Includes: Oven bulbs Cleaning supplies
✓ Sliding Unloading Shelf on 1/2/3-Deck Ovens 2nd shelf available as an option	✓ Bake Timer with Manual Shut-Off Alarm	
✓ Dual Xenon Oven Deck Lights	✓ Single-Push Auto Bake Timer with Alarm	
	✓ Lockable Casters on 1/2/3/4-Deck Ovens	

Optional Features




☐ XTREME Performance™ 500°C Extended maximum baking temperature	☐ Extra High Deck N/A with XTREME Performance 500°C	☐ Side Shield Panel
☐ Artisan High-Temperature Clay Stones Rec. for baking temperatures over 370°C	☐ Power Guard™ Control system for limited power supply	☐ Additional Sliding Unloading Shelf
☐ Extended Ventilation Hood Rec. for Bakery and XTREME Performance	☐ Dual Voltage System Switchable (230V 3ph and 400V 3ph+N)	☐ Fixed Unloading Shelf on 4-Deck Oven
☐ Factory Direct Ventilation System Requires Extended Ventilation Hood	☐ Underbuilt Cabinet (UBC)	☐ Side Shelf Maximum 2 per side
☐ 7-Day Automatic On/Off Timer	☐ Underbuilt Cabinet with Proofer (UBC-P)	☐ Oil and Spice Rack Includes pizza cutter
☐ Phantom Black Finish	☐ Lockable Casters for 5-Deck Oven	☐ Pizza Tool Holder Holds up to 3 tools
☐ Disassemble Design 2-Deck Oven	☐ Marine Option Adapted for offshore installations	☐ Pizza Tools Loading Peels (33, 36, 45, 50 cm) Turning Peels (20, 23 cm) Oven Brush Freestanding Peel Holder
☐ Steam System N/A with XTREME Performance 500°C	☐ Near Coastal Option Enhanced protection against saltwater	

One oven, multiple possibilities. Individually configured decks let you bake different products at once.




Example: **Deck 1** for Bakery, **Deck 2** for Standard Pizza, and **Deck 3** for High Temperature Pizza.

Technical Drawings




1121
Front
Side
Rear

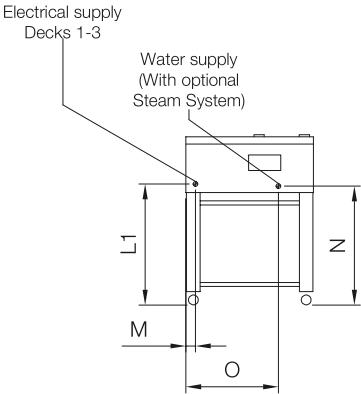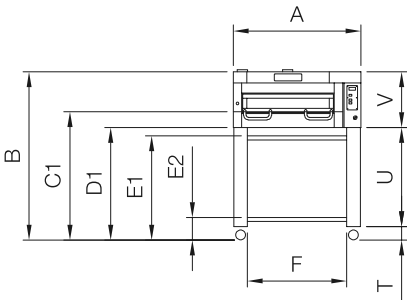




1122
Front
Side
Rear






1123
Front
Side
Rear





1124
Front
Side
Rear

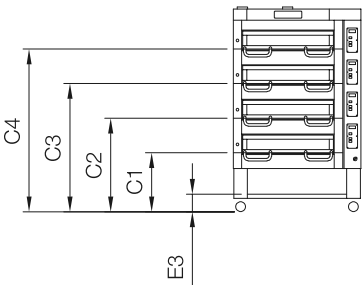

1125
Front
Side
Rear

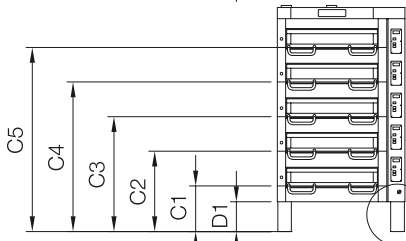



1121 - 1125
Top



Standard
Ceramic Clay Stones

Optional
Artisan High-Temperature Clay Stones

1121 - 1125
Baking Surface
Stone size



- Notes**
- Required 50 mm minimum clearance on all sides.
 - Optional Steam System: Measurement "K" includes the required minimum clearance.
 - Oven must be installed on a flat horizontal surface.
 - Installation next to a deep fryer, hub, pasta cooker or similar equipment requires an optional Side Shield Panel.
 - Optional Extra High Deck does not change the oven exterior height in measurement "B".

External Dimensions

See page 2	Description	Unit	1121	1122	1123	1124	1125
A	Oven Width	mm	1500	1500	1500	1500	1500
B	Total Oven Height	a) With Hood (standard)	mm	1649	1818	1902	1987
		b) Without Hood	mm	1579	1748	1832	1917
C1	Height to Baking Surface, Deck 1 ¹⁾	a) Standard Deck	mm	1258	1088	833	579
		b) Extra High Deck (option) ²⁾	mm	1233	1063	808	554
C2	Height to Baking Surface, Deck 2 ¹⁾	a) Standard Deck	mm	-	1427	1172	918
		b) Extra High Deck (option) ²⁾	mm	-	1402	1147	893
C3	Height to Baking Surface, Deck 3 ¹⁾	a) Standard Deck	mm	-	-	1511	1257
		b) Extra High Deck (option) ²⁾	mm	-	-	1486	1232
C4	Height to Baking Surface, Deck 4 ¹⁾	a) Standard Deck	mm	-	-	-	1596
		b) Extra High Deck (option) ²⁾	mm	-	-	-	1571
C5	Height to Baking Surface, Deck 5 ¹⁾	a) Standard Deck	mm	-	-	-	-
		b) Extra High Deck (option) ²⁾	mm	-	-	-	-
D1	Height to Bottom of Oven (standard)	mm	1102	932	677	423	291
D2	Height to Bottom of Oven (for 5-deck ovens with optional casters) ³⁾	mm	-	-	-	-	184
E1	Height to Upper Sliding Shelf	mm	1021	851	596	-	-
E2	Height to Lower Sliding Shelf	mm	212	212	212	-	-
E3	Height to Fixed Shelf (option for 4-deck ovens)	mm	-	-	-	179	-
F	Shelf Width	mm	1353	1353	1353	1353	1353
G	Oven Depth, with Hood	a) Ventilation Hood (standard)	mm	1408	1408	1408	1408
		b) Extended Ventilation Hood (option)	mm	1578	1578	1578	1578
H	Oven Depth, without Hood	mm	1273	1273	1273	1273	1273
I	Depth of Sliding Shelf when Fully Extended	mm	539	539	539	-	-
J	Depth with Handles	a) Closed door	mm	1333	1333	1333	1333
		b) Open door	mm	1473	1473	1473	1473
K	Depth of Steam System (option)	mm	100	100	100	100	100
L1	Height Position for Electrical Supply, Decks 1-3 [± 25 mm]	mm	1188	1018	763	509	377
L2	Height Position for Electrical Supply, Decks 4-5 [± 25 mm]	mm	-	-	-	1526	1394
M	Width Position for Electrical Supply [± 50 mm]	mm	93	93	93	93	93
N	Height Position for Water Supply (with optional Steam System)	mm	1166	996	741	487	355
O	Width Position for Water Supply (with optional Steam System)	mm	1155	1155	1155	1155	1155
P	Depth Position for Front Ventilation (with Hood attached)	mm	110	110	110	110	110
Q	Width Position for Front Ventilation (with Hood attached)	mm	662	662	662	662	662
R	Depth Position for Rear Ventilation	mm	122	122	122	122	122
S	Width Position for Rear Ventilation	mm	90	90	90	90	90
T	Height of Casters Only (1 to 4 decks)	mm	132	132	132	132	-
U	Height of Legs Only	mm	970	800	545	291	291
V	Height of Oven Only	a) With Hood (standard)	mm	547	886	1225	1564
		b) Without Hood	mm	477	816	1155	1494

Note 1) Add +12 mm for optional Artisan High-Temperature Clay Stones.

Note 2) Optional Extra High Deck does not change the oven exterior height in measurement "B".

Note 3) All other heights are lowered by 107 mm with optional casters for 5-deck ovens.

Internal Dimensions

See page 2	Description	Unit	1121	1122	1123	1124	1125
X1	Stone size, depth - Ceramic Clay Stone (standard)	mm	1070	1070	1070	1070	1070
X2	Stone size, depth - Artisan High-Temperature Clay Stone (option)	mm	535	535	535	535	535
Y	Stone size, width	mm	535	535	535	535	535
-	No. of Stones	a) Ceramic Clay Stone (standard)	pcs	2	2	2	2
		b) Artisan HT Clay Stone (option)	pcs	4	4	4	4
X1	Total baking surface, depth	mm	1070	1070	1070	1070	1070
Z	Total baking surface, width	mm	1070	1070	1070	1070	1070
-	Total baking surface, area	m ²	1,1	1,1	1,1	1,1	1,1
-	Internal deck height	a) Standard Deck	mm	210	210	210	210
		b) Extra High Deck (option)	mm	245	245	245	245
-	Deck door opening height	a) Standard Deck	mm	146	146	146	146
		b) Extra High Deck (option)	mm	181	181	181	181

Packing Dimensions

Description	Unit	1121	1122	1123	1124	1125
Net weight	kg	320	488	662	795	974
Gross weight (total)	kg	364	535	715	853	1045
Size / Dimensions	a) Width	mm	1600	1600	1600	2000
	b) Depth	mm	1600	1600	1600	1600
	c) Height	mm	740	990	1340	2120
Volume	m ³	1,89	2,53	3,43	4,30	6,78

Guidelines for choosing the right oven

1. Measure the available space for the oven.
2. Determine the maximum capacity need per hour and average bake time.
(See capacity tables for guidance).
3. Note that different bake temperatures require separate decks.
4. Factor in time needed for loading and unloading pizzas.
5. Consider potential future expansion plans and the need for additional decks.



OvenIQ
Configurator™

Capacity tables

Round pizza (mm)	Capacity, per deck	Rectangular pizza (mm)		Capacity, per deck
		Length	Width	
200	25	400	300	6
250	16	600	400	3
300	10	600	450	3
330	9	630	470	2
350	9	650	530	2
400	6	660	457	2
450	4	700	500	2
500	4	762	457	2
600	2	800	600	1

Electrical

Voltage	Parameters (Per deck, unless specified)		Unit	1121	1122	1123	1124	1125
230 V 1 ph + N 50/60 Hz	Max. Current ¹⁾		Amps	62,1	62,3	62,5	62,7	62,9
	Average Current at normal operation		Amps	21,7	21,8	21,9	21,9	22,0
	Min. Breaker (Type C is rec.)		Amps	68,3	68,5	68,7	69,0	69,2
	Max. Power		kW	14,3	14,3	14,3	14,3	14,3
230 V 3 ph 50/60 Hz	Max. Current ¹⁾		Amps	36,0	36,2	36,4	36,5	36,7
	Average Current at normal operation		Amps	12,6	12,7	12,7	12,8	12,9
	Min. Breaker (Type C is rec.)		Amps	39,6	39,8	40,0	40,2	40,4
	Max. Power		kW	14,3	14,3	14,3	14,3	14,3
400 V 3 ph + N 50/60 Hz	Max. Current ¹⁾	a) Per deck	Amps	20,8	20,9	21,2	21,4	21,6
		b) Single cable	Amps	20,8	41,6	62,5	-	-
		c) Dual cables ²⁾	Amps	-	-	-	62,5 + 20,8	62,6 + 41,6
	Average Current at normal operation	a) Per deck	Amps	7,3	7,3	7,4	7,5	7,6
		b) Total (oven)	Amps	7,3	14,7	22,2	29,9	37,8
	Min. Breaker (Type C is rec.)	a) Per deck	Amps	22,9	23,0	23,3	23,5	23,8
		b) Total (oven)	Amps	22,9	46,1	69,8	94,1	118,8
	Max. Power	a) Per deck	kW	14,3	14,3	14,3	14,3	14,3
		b) Total (oven)	kW	14,3	28,5	42,8	57,1	71,4

Note 1) Only at start-up (~20 min) with activated TurboStart or all heat zones at max.

Note 2) First cable for decks 1-3; Second cable for decks 4-5.

Ventilation

EPA 202 Tested	1121	1122	1123	1124	1125
PizzaMaster electric deck ovens conform to ventilation recommendations set forth by ANSI/NFPA96 using EPA 202 test method. Grease-laden vapor test, EPA 202 (ventless requirement): 8 hr, Pepperoni pizza, < 5,00 mg/m ³ .	✓	✓	✓	✓	✓

How to install	Connection(s)				Air flow					
	Qty	Pos	Unit	Value	Unit	1121	1122	1123	1124	1125
Factory Direct Vent. System (option) ¹⁾	1	Center	mm	200	m³/h	825	949	1073	1196	1320
Direct Ventilation ²⁾	2	Front	mm	160	m³/h	825	949	1073	1196	1320
		Rear	mm	100	m³/h	34	67	101	135	168
Under External Hood	-	-	-	-	m³/h	619	712	804	897	990

Note 1) Requires Extended Ventilation Hood.

Note 2) For best performance, Extended Ventilation Hood is recommended.

Exhaust temperature (See page 3 for measurement "B/b")			
Connection	Unit	"B/b" + 400 mm	"B/b" + 1000 mm
Center ¹⁾	°C	-	42
Front ²⁾	°C	46	42
Rear ²⁾	°C	115	109

Note 1) With optional Factory Direct Ventilation System.

Note 2) Without optional Factory Direct Ventilation System.

Heat emission ¹⁾						
Type	Unit	1121	1122	1123	1124	1125
Total	kW	5,0	10,0	15,1	20,1	25,1
Sensible	kW	1,4	2,9	4,3	5,7	7,2
Latent	kW	3,6	7,2	10,8	14,4	17,9

Note 1) At normal operation, all decks running.

Water Only for Optional Steam System

Requirements	Value	Requirements	Value
Water drain	Not required	Connection	G 3/4"
Backflow protection	Required, not included	General water quality	Cold Drinking Water
Auto shut-off valve	Included	Water softener	Recommended
Incoming water pressure	0,2 - 0,4 MPa	Particle filter	Recommended

Water quality requirements	Unit	Value
Magnesium (Mg)	mg/l	< 30
Calcium (Ca)	mg/l	20 - 100
Hardness	dH	4,0 - 7,0
Acidity at 20°C	pH	7,5 - 8,5
Alkalinity (HCO ₃)	mg/l	> 60