


PREMIER KPS 42 SF

Blast Chiller/Freezer for remote cooling system



1 / 1 GN



600 x 400 EN

ACCESSORIES INCLUDED

N/A

OPTIONAL EXTRAS

N/A

ITEM NUMBER: 875809959

COUNTRY OF ORIGIN: ITALY

PREMIER KPS 42 SF is a HACCP compliant blast chiller/freezer for connection to a remote cooling system. Compatible with 1/1 GN and/or EN 600 x 400mm trays (max of 10). Chilling/freezing capacity of 50/25 kg. It features IFR control system and a user friendly 7" touch display. Use the preset favorite programs or store your customized cycles. Legs are adjustable 105-150 mm.

- 7" touch display with coloured icons
- USB port for download of cooling log data
- Cooling functions: Chilling (soft/hard), freezing (soft/hard), preservation, precooling, infinity
- 'Hot' functions: Thawing, proofing, retarder-prover
- Choose either IFR operation, time or temperature controlled chill/freeze cycle
- Prevent surface freezing damage with the IFR blast chilling function
- Triple-point probe (3 measuring points)
- HACCP: Infinite events up to one year of recording
- Audio-visual HACCP alarms in case of power failure or if a temperature limit is exceeded
- Alarms: Saving up to 40 events
- 10 favorite programs for both blast chilling, blast freezing and retarder proving
- Up to 20 customized cycles can be stored
- Automatic shift to 'storage mode' after the chilling process
- Automatic fan cut-out when door is opened
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Automatic defrosting
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 10
- The internal fan section can be opened for cleaning around and behind the unit
- Right hand hinged door
- Full-height integrated handle
- 90° self-closing door system
- Removable magnetic door gasket

WARRANTY PERIOD

3 Years on Parts & Labour - based on country agreement

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant type: R452A ready

CERTIFICATIONS





HOSHIZAKI

PREMIER KPS 42 SF

TECHNICAL SPECIFICATIONS


GN tray size	Maximum number of trays	Temperature range	Power supply	Climate class	Ref. capacity - at -25°C	Chilling capacity (from +70°C to +3°C in 90 minutes)	Freezing capacity (from +70°C to -18°C in 4 hours)
1/1 GN / 400 x 600 mm EN	10	-40/+45°C	230V 1N 50-60Hz	5 (max. ambient 40°C w/ 40% RH)	3,500 W	50 kg	25 kg

Distance between guide positions, GN/EN	Dimensions internal (W x D x H)	Maximum depth of gastro pans, GN/EN	Height from base to first guide	Height from ceiling to top guide
530/600	645 mm x 702 mm x 780 mm	325/400	61 mm	74.5 mm

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height including legs (minimum)	Height including legs (maximum)	Net weight
874 mm	990 mm	2,054 mm	1.777 m ³	180 kg	801.5 mm	852 mm	1,737 mm	1,782 mm	155 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

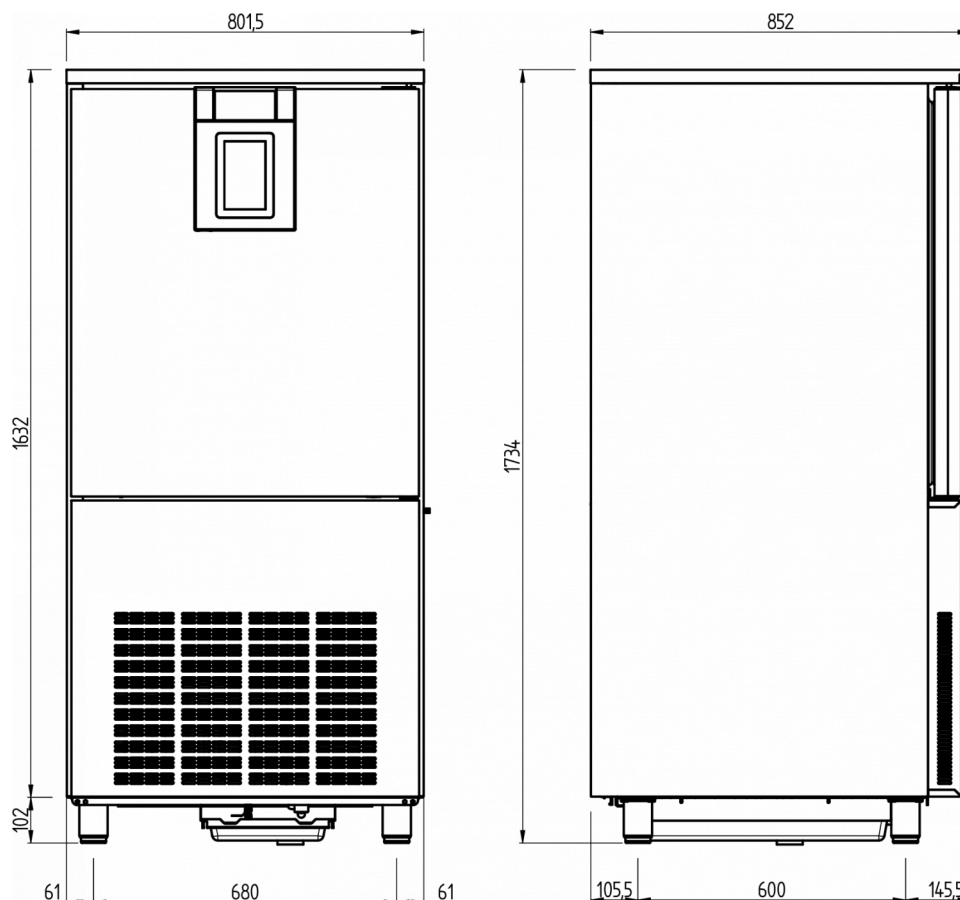

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com