

TUC-60G-HC~FGD01

Undercounter Foodservice Refrigerator, 2 Glass Swing Doors



Dimensions		Build		Technical	
External Width (mm)	1534	Door Description	2 Full Glass Swing Doors	Temperature Range	0.5 : 3.3°C
External Depth (mm)	766	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Refrigerant	R290
External Height (mm)	839	Interior Construction	Clear coated aluminium, stainless steel base	Voltage/Frequency/Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26mm for rear bumpers and 42mm for door handles.	Air Intake Position	Front	Amps	1.3
Net Volume (Litres)	375	Ventilation Position	Front	Watts	299
Gross Volume (Litres)	439	Clearance Required	Zero back and sides	Temperature Class	M1
Display Area (m ²)	0.71	Cord Length (Meters)	2.13	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Supplied Shelves	4	Internal Lighting	LED	Test Standard	EN 23953
Shelf Size (L x D mm)	Two 700 x 546 + Two 700 x 349	Standard w/ Locks	Standard	EEC	B
Internal Net Height (mm)	630			Energy Efficiency Index	15.4
Unpackaged Weight (kg)	182			Defrost Type	Auto
Packaged Weight (kg)	193			Energy Consumption (kWh/24h)	3.01
Packaged Dimensions (W x D x H mm)	1601 x 832 x 1270			Energy Consumption (kWh/Annum)	1102
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)				



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia



0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-60G-HC~FGD01

Undercounter Foodservice Refrigerator, 2 Glass Swing Doors

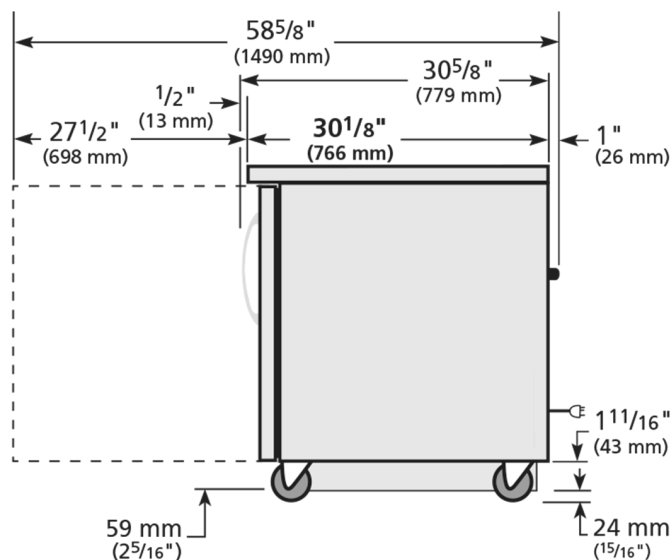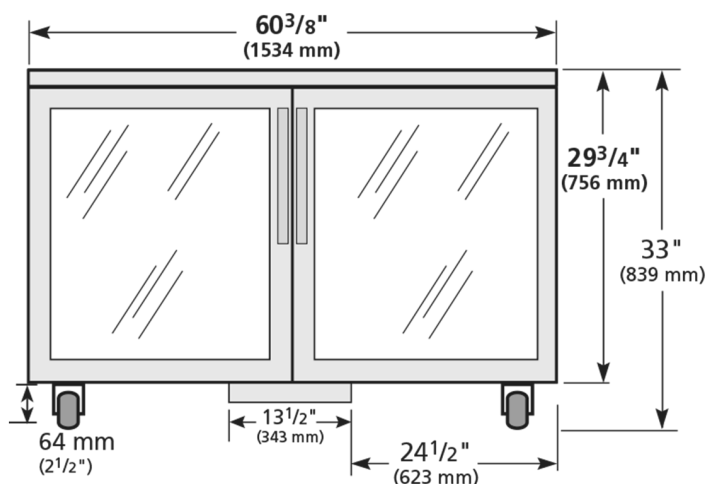

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

